




4675 West 160th St
 Cleveland, OH 44135
 PH: 1.800.321.9532
 FX: 1.800.321.9535

ENGINEERING SUBMITTAL

HDPE PLASTIC ROOF VENT

Job Reference

Engineering Specification: Arfco HDPE Plastic Roof Vents are used to relieve moisture vapor trapped within a roofing system. Moisture may have entered the system due to drying of lightweight insulating concrete materials, leaks, faulty vapor retarders, or during construction. Roof Vents can prevent blistering, delamination, and billowing of the membrane, while helping to maintain thermal design efficiency. Roof Vents are manufactured with a one-way valve, which opens to relieve moisture vapor pressure and then closes to prevent moisture from re-entering the system.

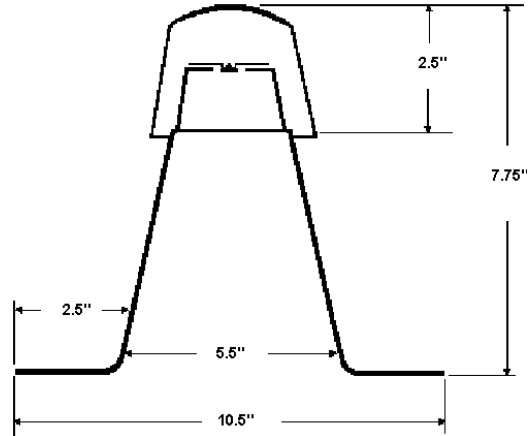

- ◆ Plastic Roof Vent made of High Density Polyethylene (HDPE) for BUR and modified bitumen applications
- ◆ One-Way Vents are manufactured with a one-way valve which opens to relieve moisture vapor pressure and then closes to prevent moisture from re-entering the system
- ◆ Locking vandal-proof cap prevents entry of wind-blown snow or rain
- ◆ Recommended installation spacing is one vent per 1000 square feet

✓	Product No.	Description	Pack	Carton Weight
	14726	HDPE Roof Vent, 1-Way	25	20 lbs

Data is subject to manufacturing tolerances.